

# BLUEKIN

## BUILDING MATERIALS



GENERAL CONSTRUCTION

DRYWALL/ACOUSTICAL

ROOFING

CONCRETE ACCESSORIES

SPECIALTY ITEMS & MORE

Bulk Nails Packaging and Size

- Quality guarantee
- Custom make product
- Small order acceptable
- Free samples
- Faster delivery
- **Best service**

Contents

Nails, ..... 1

General Construction, ..... 2

Drywall, ..... 5

Roofing ..... 6

Galvanized..... 9

Speciality, ..... 12

✧ SUCCESSFUL CASE ✧



✧ OUR TEAM ✧





## Common Nails

### Bright Common – Smooth Shank

Flat head with smooth shank and diamond point. For general construction, framing, and other carpentry projects.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	1 1/4"	14	7/32"	546	
4d	1 1/2"	12	1/4"	296	
5d	1 3/4"	12	1/4"	194	
6d	2"	11	17/64"	181	
8d	2 1/2"	10	9/32"	99	
10d	3"	9	5/16"	69	
12d	3 1/4"	9	5/16"	63	
16d	3 1/2"	8	11/32"	49	
20d	4"	6	13/32"	31	
30d	4 1/2"	6	7/16"	24	
40d	5"	6	15/32"	18	
50d	5 1/2"	6	1/2"	14	
60d	6"	4	17/32"	11	



### Green Vinyl Common Nails

Flat countersunk head with smooth shank and diamond point. VC coating lubricates wood and holds fast in framing.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
10d	3"	9	5/16"	69	
16d	3 1/2"	8	11/32"	49	
20d	4"	6	13/32"	31	



### Green Vinyl Sinkers nail

Flat countersunk head with smooth shank and diamond point. VC coating lubricates wood and holds fast in framing; thin shank reduces splitting.

Size	Nail Length	Gauge	Head Dia.	Count Per Lb.	
3d	1 1/8"	15.5	11/64"	923	
4d	1 3/8"	14	13/64"	527	
6d	1 7/8"	13	15/64"	270	
8d	2 3/8"	11.5	17/64"	150	
12d	3 1/8"	10	5/16"	81	
16d	3 1/4"	9	11/32"	63	
20d	3 3/4"	7	3/8"	40	



**Bright Box Nail**

Flat head with smooth shank and diamond point. Used to construct crates and boxes and for light construction and carpentry work. Thinner shank reduces splitting, especially in Douglas fir and pine.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	1¼"	14	7/32"	636	
4d	1½"	14	7/32"	474	
6d	2"	12	17/64"	236	
8d	2½"	12	17/64"	145	
10d	3"	11	9/32"	84	
12d	3¼"	10	5/16"	78	
16d	3½"	10	11/32"	71	
20d	4"	8	3/8"	52	

**Bright Joist Hanger (Truss) Nail**

Flat head with barbed shank and diamond point. For attaching truss plates and other hardware when building roof trusses and other framing construction.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1¼"	11	17/64"	233	
1½"	9	9/32"	149	
1½"	11	17/64"	200	
1½"	10¼	9/32"	120	
1½"	9	9/32"	125	

**Bright Duplex Nail**

Double flat head with smooth shank and diamond point. Driven into wood to the lower head to allow easy removal from temporary structures. Used for framework, scaffolds, and other temporary structures.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
6d	27/64"	11.5	3/16"	154	
8d	25/8"	10.25	15/64"	88	
10d	23/4"	9	5/16"	59	
16d	31/2"	8	9/32"	44	

**Bright Finish Nail**


Countersunk head with smooth shank and diamond point. Small cupped head allows countersinking below wood surface for later filling—giving smooth appearance to finish carpentry and trim.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	1¼"	15.5	0.099"	887	
4d	1½"	15	0.1055"	629	
6d	2"	13	0.135"	290	
8d	2½"	12.5	0.142"	194	
10d	3"	11.5	0.155"	122	
12d	3¾"	11.5	0.155"	114	
16d	3½"	11	0.162"	91	

**Bright Pole Barn – Ring Shank T.H.S. Nail**

Flat head with ringed shank and diamond point. For post frame construction and other heavy-duty applications. High carbon steel.

Size	Nail Length	Gauge	Head Dia.	Nails per Lb.	
8d	2½"	12	9/32"	99	
16d	1¾"	9	5/16"	57	
20d	4"	7	3/8"	35	
30d	4½"	7	3/8"	31	
40d	5"	7	3/8"	28	
60d	6"	7	3/8"	24	

**Fluted Masonry Nails**

Flat head with fluted shank and diamond point. For nailing lumber to concrete and masonry. Made from spring steel wire and tempered. Bright finish.

Nail Length	Gauge	Head Dia.	Count per Lb.	
$\frac{1}{2}$ "	9	$\frac{11}{32}$ "	355	
$\frac{3}{4}$ "	9	$\frac{11}{32}$ "	194	
1"	9	$\frac{11}{32}$ "	164	
$1\frac{1}{4}$ "	9	$\frac{11}{32}$ "	148	
$1\frac{1}{2}$ "	9	$\frac{11}{32}$ "	129	
$1\frac{3}{4}$ "	9	$\frac{11}{32}$ "	110	
2"	9	$\frac{11}{32}$ "	99	
$2\frac{1}{2}$ "	9	$\frac{11}{32}$ "	86	
$2\frac{3}{4}$ "	9	$\frac{11}{32}$ "	78	
3"	9	$\frac{11}{32}$ "	65	
$3\frac{1}{2}$ "	9	$\frac{11}{32}$ "	52	

**Cut Masonry Nails**

For attaching wood to masonry and fresh concrete.

Size	Nail Length	Count per Lb.	
4d	$1\frac{1}{2}$ "	154	
6d	2"	103	
8d	$2\frac{1}{2}$ "	81	
10d	3"	52	

**Bright Spikes**

Flat head with diamond point. For joining heavy timbers such as railroad ties, landscape timbers, and log house construction.

Nail Length	Diameter	Head Dia.	Count per Lb.	
8"	$\frac{3}{8}$ "	$\frac{3}{4}$ "	4	
10"	$\frac{3}{8}$ "	$\frac{3}{4}$ "	3	
12"	$\frac{3}{8}$ "	$\frac{3}{4}$ "	2	



## PC Drywall

Cupped head with smooth shank. For attaching drywall to wood studs. Phosphate coated to drive easily and not react with drywall compound.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1 <sup>3</sup> / <sub>8</sub> "	13	5 <sup>5</sup> / <sub>16</sub> "	324	
1 <sup>3</sup> / <sub>8</sub> "	14	1 <sup>1</sup> / <sub>4</sub> "	324	
1 <sup>5</sup> / <sub>8</sub> "	13	5 <sup>5</sup> / <sub>16</sub> "	271	
1 <sup>7</sup> / <sub>8</sub> "	13	5 <sup>5</sup> / <sub>16</sub> "	207	
2 <sup>1</sup> / <sub>8</sub> "	11.5	3 <sup>3</sup> / <sub>8</sub> "	192	
2 <sup>3</sup> / <sub>8</sub> "	11.5	3 <sup>3</sup> / <sub>8</sub> "	177	



## Electro-galvanized Smooth Plasterboard

Flat, thin head with smooth and ring shank. Diamond point. Used to install wall surfacing materials. Slightly smaller head and thinner shank than drywall nails.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1 <sup>1</sup> / <sub>4</sub> "	13	1 <sup>9</sup> / <sub>64</sub> "	412	
1 <sup>1</sup> / <sub>2</sub> "	13	1 <sup>9</sup> / <sub>64</sub> "	348	



## Electro-galvanized Ring Shank Plasterboard

Flat, thin head with smooth and ring shank. Diamond point. Used to install wall surfacing materials. Slightly smaller head and thinner shank than drywall nails.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1 <sup>1</sup> / <sub>4</sub> "	13	1 <sup>9</sup> / <sub>64</sub> "	412	
1 <sup>1</sup> / <sub>2</sub> "	13	1 <sup>9</sup> / <sub>64</sub> "	348	



## Blued Plasterboard

Flat, thin head with smooth and ring shank. Diamond point. Used to install wall surfacing materials. Slightly smaller head and thinner shank than drywall nails. Blued is a sanitized nail.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1 <sup>1</sup> / <sub>8</sub> "	13	1 <sup>9</sup> / <sub>64</sub> "	440	
1 <sup>1</sup> / <sub>4</sub> "	13	1 <sup>9</sup> / <sub>64</sub> "	412	

**Electro-galvanized Roofing**

Large, flat head with smooth shank and diamond point. Used to fasten asphalt shingles, roof felt, and insulation board. Galvanized to resist weathering.

Nail Length	Gauge	Head Dia.	Nails per Lb.	
1/2"	11	7/16"	528	
3/4"	11	7/16"	366	
7/8"	11	7/16"	323	
1"	11	7/16"	285	
1 1/4"	11	7/16"	233	
1 1/2"	11	7/16"	200	
1 3/4"	11	7/16"	171	
2"	11	7/16"	149	
2 1/2"	11	7/16"	122	
3"	11	7/16"	103	
3 1/2"	11	7/16"	89	
4"	11	7/16"	78	
5"	9	15/32"	63	
6"	9	15/32"	54	

**Hot Dip Galvanized Roofing**

Large, flat head with smooth shank and diamond point. Used to fasten asphalt shingles, roof felt, and insulation board. Hot dip galvanized to resist weathering.

Nail Length	Gauge	Head Dia.	Nails per Lb.	
7/8"	11	7/16"	323	
1"	11	7/16"	285	
1 1/4"	11	7/16"	233	
1 1/2"	11	7/16"	200	
1 3/4"	11	7/16"	171	
2"	11	7/16"	149	
2 1/2"	11	7/16"	122	
3"	11	7/16"	103	

**Hot Dip Galvanized Ring Shank Roofing**

Large, flat head with ring shank and diamond point. Used to fasten asphalt shingles, roof felt, and insulation board. Hot dip galvanized to resist weathering.

Nail Length	Gauge	Head Dia.	Nails per Lb.	
1 1/4"	11	7/16"	233	
1 1/2"	11	7/16"	200	
2 1/2"	11	7/16"	122	
3"	11	7/16"	103	

**Ring Shank Stainless Steel Roofing**

Large, flat head with ring shank and diamond point. Used to fasten asphalt shingles, roof felt, and insulation board.

Nail Length	Gauge	Head Dia.	Nails per Lb.	
1 1/4"	11	7/16"	233	

**Electro-galvanized Ring Neoprene Roofing**

Ring shank with neoprene washers underneath nail head. Used to attach corrugated metal and fiberglass roofing sheets. Galvanized to resist weathering.

Nail Length	Gauge	Head Dia.	Nails per Lb.	
1 3/4"	10	3/8"	125	
2 1/2"	10	3/8"	101	
3"	10	3/8"	84	



## Electro-galvanized Plastic Caps Nail

Ring shank with round plastic cap. Used to attach felt paper and foam sheeting to buildings.

### BOXES

Nail Length	Gauge	Head Dia.	Nails per Lb.	Lbs. per Box	
3/4"	12	1"	266	7	
7/8"	12	1"	275	8	
1"	12	1"	250	8	
1 1/4"	12	1"	212	8	
1 1/2"	12	1"	185	11	
1 3/4"	12	1"	168	13	
2"	12	1"	153	15	

### PAILS

Nail Length	Gauge	Head Dia.	Nails per Lb.	Pieces/ Pail	
3/4"	12	1"	266	3M	
7/8"	12	1"	275	3M	
1"	12	1"	250	3M	
1 1/4"	12	1"	212	3M	
1 1/2"	12	1"	185	2M	
1 3/4"	12	1"	168	2M	
2"	12	1"	153	2M	



## Lead Head

For attaching metal roofing.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1 3/4"	10	3/8"	83	
2 1/2"	10	3/8"	83	



## Round Metal Ring Shank Cap Nail

Ring shank with round metal head. Used to attach roofing felt, insulation board, and polyfilm sheeting to buildings.

### Electro-galvanized

Nail Length	Gauge	Head Dia.	Nails per Lb.	
3/4"	12	1"	117	
7/8"	12	1"	112	
1"	12	1"	107	
1 1/4"	12	1"	100	
1 1/2"	12	1"	84	
1 3/4"	12	1"	79	
2"	12	1"	74	
2 1/2"	11	1"	67	
3"	11	1"	60	
4"	9	1"	37	
5"	8	1"	27	
6"	8	1"	24	



### Hot Dip Galvanized Metal cap nails

Nail Length	Gauge	Head Dia.	Nails per Lb.	
1"	12	1"	107	
1 1/4"	12	1"	100	
1 1/2"	12	1"	84	




## Umbrella Roofing nails

Conncting the wooden material , fix in the asbestos tile and plastic tile. Ring shank and smooth shank. With Neoprene washer or without.

Nail Length	Gauge	Head Dia.	SKU
1"	9	20mm	
1 1/2"	9	20mm	
2"	9	20mm	
3"	9	20mm	





## High Wire Coil Roofing

For use with pneumatic roofing guns. Large flat head with smooth shank and diamond point. Used to fasten asphalt shingles, roof felt paper and insulation board. Galvanized to resist weathering.

To fit: Atro CN-134, Hitachi NV 45AB, Makita AN451, Bostitch N12-B, RN45, Porter Cable RN175, Fasco CN15W, Senco SCN200R, Palode PY-134

### Electro-galvanized

Nail Length	Gauge	Head Dia.	Count per Ctn.	Count per Lb.	
3/4"	11	3/8"	7.2M	21	
7/8"	11	3/8"	7.2M	23	
1"	11	3/8"	7.2M	26	
1 1/4"	11	3/8"	7.2M	34	
1 1/2"	11	3/8"	7.2M	37	
1 3/4"	11	3/8"	7.2M	43	

### Hot Dip Galvanized Ring Shank

Nail Length	Gauge	Head Dia.	Count per Ctn.	Count per Lb.	
1 1/4"	11	3/8"	7.2M	34	
1 1/2"	11	3/8"	7.2M	37	

### Stainless Steel Ring Shank

Nail Length	Gauge	Head Dia.	Count per Ctn.	Count per Lb.	
1 1/4"	11	3/8"	7.2M	34	
1 1/2"	11	3/8"	7.2M	37	



## Fine Wire Staples

Used to attach tin caps and hang insulation.

Staple Length	Boxes per Carton	Quantity per Box	
A11 3/8" x 3/8"	20	5M	
A11 1/2" x 3/8"	20	5M	
A19 1/4" x 3/8"	50	5M	



## Electro-galvanized Tile Nail

For use with clay roofing tile.

Nail Length	Gauge	Head Dia.	Nails per Lb.	
3"	9	15/32"	62	
4"	9	15/32"	50	
5"	9	15/32"	38	
5 1/2"	9	15/32"	36	
6"	9	15/32"	32	



## Wide Crown Roofing Staples

Applications include lath, insulation board, sheathing and roofing.

### Made to fit Palode

Leg	Gauge	Crown	Quantity per Box	
3/4"	16	15/16"	10M	
7/8"	16	15/16"	10M	
1"	16	15/16"	10M	
1 1/4"	16	15/16"	10M	
1 1/2"	16	15/16"	10M	
1 3/4"	16	15/16"	10M	
2"	16	15/16"	10M	

### Made to fit Senco

Leg	Gauge	Crown	Quantity per Box	
3/4"	16	1"	10M	
7/8"	16	1"	10M	
1"	16	1"	10M	
1 1/4"	16	1"	10M	
1 1/2"	16	1"	10M	

### Made to fit Bostitch

Leg	Gauge	Crown	Quantity per box	
7/8"	16	1"	10M	
1"	16	1"	10M	
1 1/4"	16	1"	10M	
1 1/2"	16	1"	10M	

**Common Nails**

Flat head with smooth shank and diamond point. For general construction, framing, and other carpentry projects.

**Electro-galvanized Common**

Electro-plated with zinc to resist weathering.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	1¼"	14	7/32"	546	
4d	1½"	12	1/4"	296	
5d	1¾"	12	1/4"	194	
6d	2"	11	17/64"	181	
8d	2½"	10	9/32"	99	
10d	3"	9	5/16"	69	
12d	3¼"	9	5/16"	63	
16d	3½"	8	11/32"	49	
20d	4"	6	13/32"	31	

**Hot Dip Galvanized Common**

Passed through a hot galvanizing line for a superior galvanized finish. For use with ACQ lumber.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	1¼"	14	7/32"	546	
4d	1½"	12	1/4"	296	
5d	1¾"	12	1/4"	194	
6d	2"	11	17/64"	181	
8d	2½"	10	9/32"	99	
10d	3"	9	5/16"	69	
12d	3¼"	9	5/16"	63	
16d	3½"	8	11/32"	49	
20d	4"	6	13/32"	31	
30d	4½"	6	7/16"	24	
40d	5"	6	15/32"	18	
60d	6"	4	17/32"	11	

**Electro-galvanized Common Ring Shank nails**

Electro-plated with zinc to resist weathering.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
6d	2"	11	17/64"	181	
8d	2½"	10	9/32"	99	
12d	3¼"	9	5/16"	63	
16d	3½"	8	11/32"	49	

**Landscape Timber Ties**

Passed through a hot galvanizing line for a superior galvanized finish. For use with ACQ lumber.

Nail Length	Diameter	Head Dia.	Count per Lb.	
6"	1/4"	1/2"	14	

**Hot Dip Galvanized Spikes**

Flat head with diamond point. For joining heavy timbers such as railroad ties, landscape timbers, and log house construction. For use with ACQ lumber.

Nail Length	Diameter	Head Dia.	Count per Lb.	
8"	3/8"	3/4"	4	
10"	3/8"	3/4"	3	
12"	3/8"	3/4"	2	

**Electro-galvanized Gutter Spikes**

Flat head with diamond point. For attaching galvanized and aluminum gutters.

Nail Length	Diameter	Head Dia.	Count per Lb.	
7"	3/16"	7/16"	16	

**Hot Dip Galvanized Ring Shank Pole Barn**

Flat head with ringed shank and diamond point. For exterior post frame construction. High carbon steel. For use with ACQ lumber.

Nail Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
30d	4½"	7	¾"	31	
40d	5"	7	¾"	28	

**Hot Dip Galvanized Ring Shank PTL Deck Nail**

Ring shank with flat head. For pressure treated lumber. Passed through a hot galvanized line for a superior galvanized finish. For use with ACQ lumber.

Nail Size	Gauge	Head Dia.	Count per Lb.	
6d	11	⅞"	140	
8d	11	⅞"	107	
10d	10	⅞"	81	
12d	10	⅞"	78	
16d	10	⅝"	71	
20d	9	¾"	55	
30d	7	¾"	31	
40d	7	¾"	28	
60d	7	¾"	24	

**Hot Dip Galvanized Spiral PTL Deck Nail**

Nail Size	Gauge	Head Dia.	Count per Lb.	
6d	11	⅞"	140	
8d	11	⅞"	107	
10d	10	⅞"	81	
12d	10	⅞"	78	
16d	10	⅝"	71	
20d	9	¾"	55	
60d	7	¾"	24	

**Box Nails**

Flat head with smooth shank and diamond point. Used to construct crates and boxes and for light construction and carpentry work. Thinner shank reduces splitting, especially in Douglas fir and pine.

**Electro-galvanized Box nails**

Electro-plated with zinc to resist weathering.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	1¼"	14	⅞"	636	
4d	1½"	14	⅞"	474	
5d	1¾"	13	1⅝"	407	
6d	2"	12	1⅞"	236	
7d	2¼"	12	1⅞"	210	
8d	2½"	12	1⅞"	145	
10d	3"	11	⅞"	84	
12d	3¼"	10	⅝"	78	
16d	3½"	10	⅝"	71	
20d	4"	8	¾"	52	
30d	4½"	9	¾"	46	

**Hot Dip Galvanized Box nails**

Passed through a hot galvanized line for a superior galvanized finish. For use with ACQ lumber.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	1¼"	14	⅞"	636	
4d	1½"	14	⅞"	474	
5d	1¾"	13	1⅝"	407	
6d	2"	12	1⅞"	236	
7d	2¼"	12	1⅞"	210	
8d	2½"	12	1⅞"	145	
10d	3"	11	⅞"	84	
12d	3¼"	10	⅝"	78	
16d	3½"	10	⅝"	71	
20d	4"	8	¾"	52	

**Fence Staples****Electro-galvanized Staple**

Smooth shank with slash points. For securing wire fence to wooden posts.

Staple Length	Gauge	Count per Lb.	
$\frac{3}{4}$ "	14	143	
1"	9	101	
$1\frac{1}{4}$ "	9	88	
$1\frac{1}{2}$ "	9	49	
$1\frac{3}{4}$ "	9	60	

**Hot Dip Galvanized Staple**

Passed through a hot galvanizing line for a superior galvanized finish. For use with ACQ lumber.

Staple Length	Gauge	Count per Lb.	
$2\frac{1}{2}$ "	6	43	

**Finish Nails**

Countersunk head with smooth shank and diamond point. Small cupped head allows countersinking below wood surface for later filling – giving smooth appearance to finish carpentry and trim.

**Electro-galvanized Finish**

Electro-plated with zinc to resist weathering.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	$1\frac{1}{4}$ "	15.5	0.099"	887	
6d	2"	13	0.135"	290	
8d	$2\frac{1}{2}$ "	12.5	0.142"	194	

**Hot Dip Galvanized Finish**

Passed through a hot galvanizing line for a superior galvanized finish. For use with ACQ lumber.

Size	Nail Length	Gauge	Head Dia.	Count per Lb.	
3d	$1\frac{1}{4}$ "	15.5	0.099"	887	
4d	$1\frac{1}{2}$ "	15	0.1055"	629	
6d	2"	13	0.135"	290	
8d	$2\frac{1}{2}$ "	12.5	0.142"	194	
10d	3"	11.5	0.155"	122	
12d	$3\frac{1}{4}$ "	11.5	0.155"	113	
16d	$3\frac{1}{2}$ "	11	0.162"	91	

**Casing Nails**

Deep countersunk head with smooth shank and diamond point. Used for finish work, including door jambs, moulding, and casing.

**Electro-galvanized Casing**

Electro-plated with zinc to resist weathering.

Size	Nail Length	Gauge	Nails per Lb.	
6d	2"	12.5	245	
8d	$2\frac{1}{2}$ "	11.5	146	
16d	$3\frac{1}{2}$ "	10	77	

**Hot Dip Galvanized Casing**

Passed through a hot galvanizing line for a superior galvanized finish. For use with ACQ lumber.

Size	Nail Length	Gauge	Nails per Lb.	
6d	2"	12.5	245	
8d	$2\frac{1}{2}$ "	11.5	146	
16d	$3\frac{1}{2}$ "	10	77	

**Joist Hanger (Truss) Nails**

Flat head with barbed shank and diamond point. For attaching truss plates and other hardware when building roof trusses and other framing construction.

**Electro-galvanized Joist Hanger (Truss)**

Nail Length	Gauge	Head Dia.	Count per Lb.	
$1\frac{1}{4}$ "	11	$\frac{17}{64}$ "	233	
$1\frac{1}{4}$ "	9	$\frac{9}{32}$ "	149	
$1\frac{1}{2}$ "	11	$\frac{17}{64}$ "	200	
$1\frac{1}{2}$ "	9	$\frac{9}{32}$ "	125	

**Hot Dip Galvanized Joist Hanger (Truss)**

For use with ACQ lumber.

Nail Length	Gauge	Head Dia.	Count per Lb.	
$1\frac{1}{4}$ "	11	$\frac{17}{64}$ "	233	
$1\frac{1}{4}$ "	9	$\frac{9}{32}$ "	149	
$1\frac{1}{2}$ "	11	$\frac{17}{64}$ "	200	
$1\frac{1}{2}$ "	9	$\frac{9}{32}$ "	125	



## Mechanical-galvanized Cut Masonry

Four-sided nail with square point. For joining ACQ lumber to concrete subflooring. Square point prevents splitting of hardwood boards.

Size	Nail Length	Count per Lb.	
8d	2½"	81	



## Bright Underlayment

Flat head with ringed shank and diamond point. For laying plywood or composition subflooring over existing wood floors or floor joists. Ringed shank increases holding power. Also known as sub-flooring nails.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1¼"	12.5	¼"	351	
1⅝"	12.5	¼"	269	
1⅞"	12	¼"	218	



## Electro-galvanized Tension Pins

Tension temper-hardened fasteners used to attach furring strips, clips and hangers to masonry.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1⅞"	14	⅜"	516	



## Electro-galvanized Concrete Stub

Large flat head with smooth shank. Temper hardened steel. For attaching electrical fixtures and conduits, metal lath and other fixtures to non-load bearing concrete.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1½"	9	⅜"	378	



## Electro-galvanized Fine

For use in shake shingles and Chamfer.

Nail Size	Gauge	Head Dia.	Count per Lb.	
3d	15.5	11/64"	783	



## Furring Nail with ⅜" WAD

Flat head with smooth shank and diamond point. Electro-galvanized. For stucco applications.


Nail Length	Gauge	Head Dia.	Count per Lb.	
1½"	12	⅜"	150	
1¾"	12	⅜"	150	
1⅞"	11	⅜"	105	

## Furring Nail no WAD

Flat head with smooth shank and diamond point. Electro-galvanized. For stucco applications.

Nail Length	Gauge	Head Dia.	Count per Lb.	
1½"	12	⅜"	250	
1⅞"	11	⅜"	195	



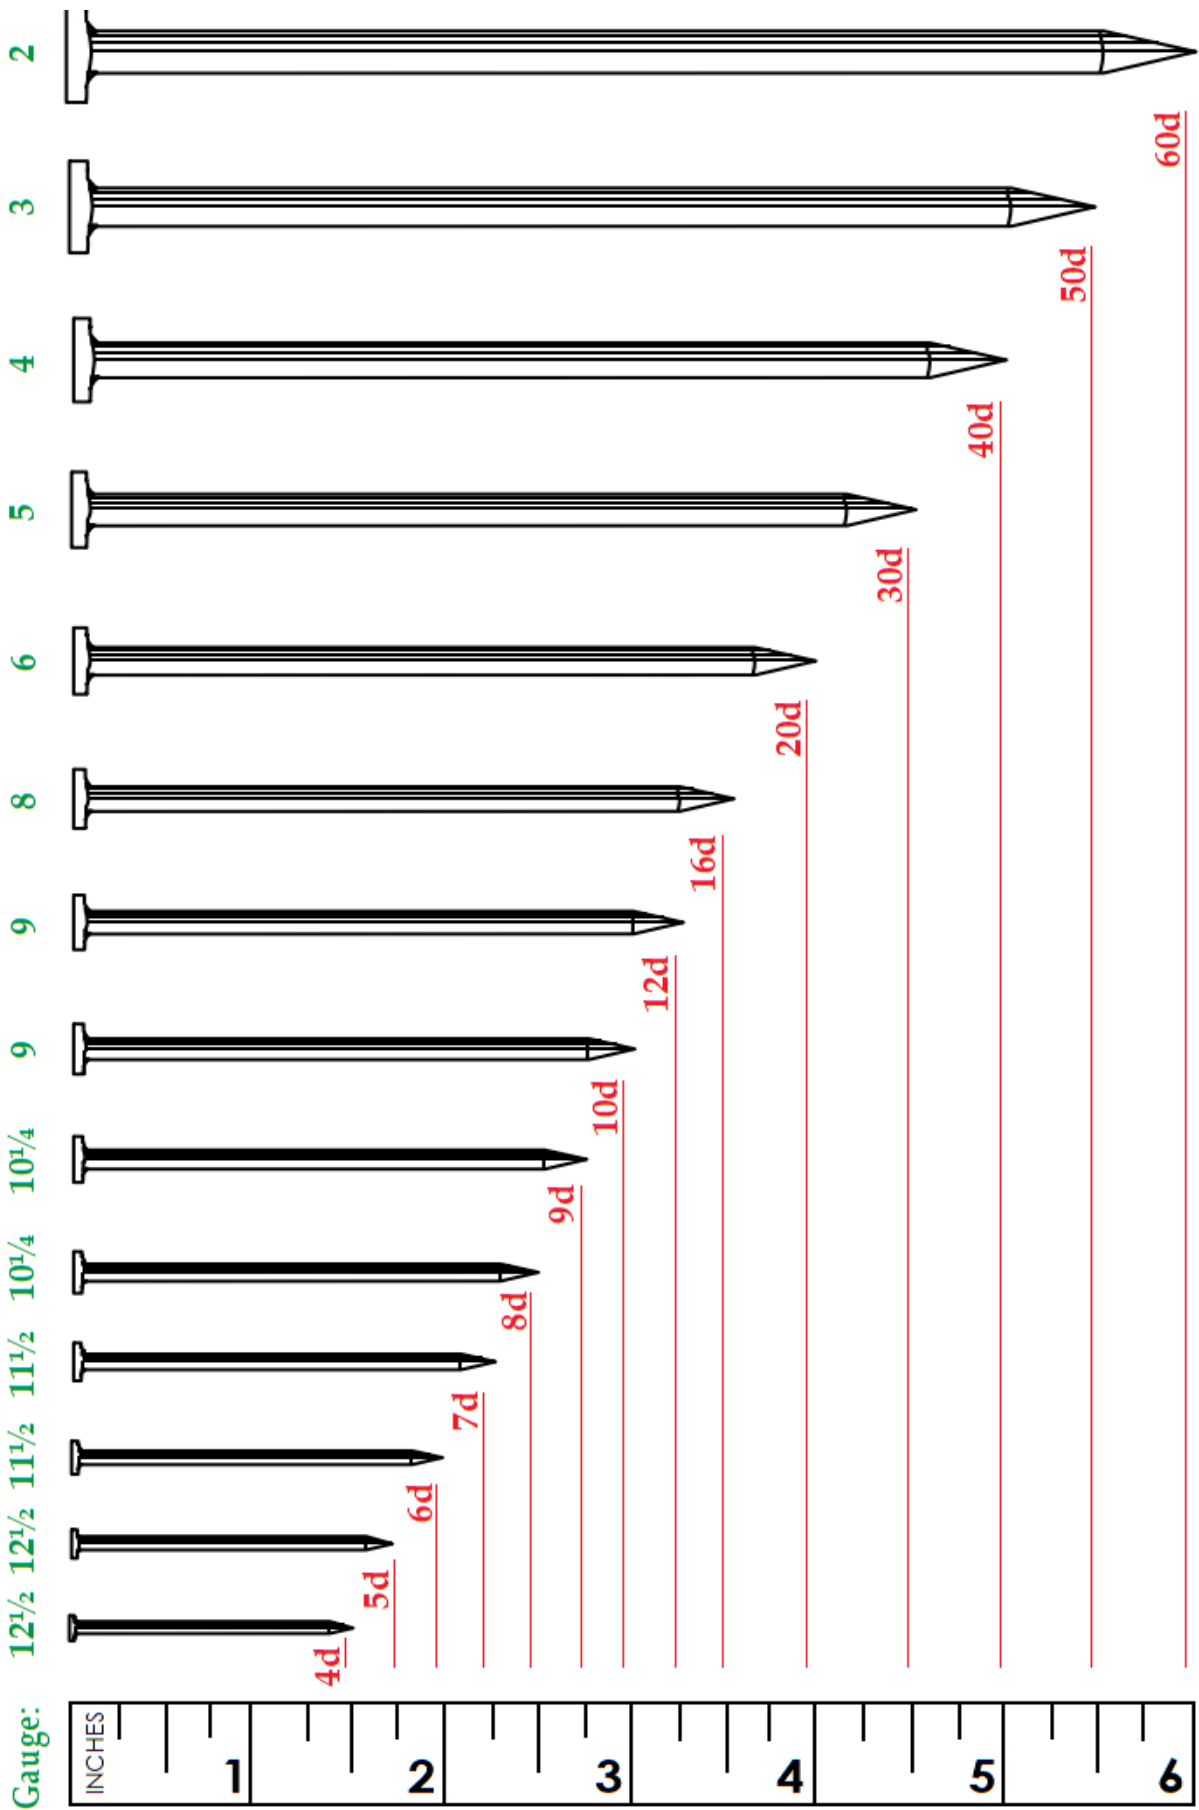

Nail Size Chart

[illegible]

# BLUEKIN®

Tianjin Bluekin Industries Limited specialized in the manufacturing and distributing hardware and plastic products for more than 15 years.our hardware including iron and steel wires,mesh fence,fencing post ,nails and DIY products . We produce and supply the products with various specifications according to the requirements of the customers. Your order will be inspected at every stage of manufacturing to ensure we meet your requirements.

The highest quality and service will meet your demands. We will continue to practise the win-win promise, hand in hand with partners to keep good and long cooperation. based on steady development and innovation, we are going forward to be one of the most professional and competitive company.



Tel:86-22-58196340 Fax: 86-22-58196345

Email:sales@bluekin.com

Http://www.bluekin.com